



**GENERATIONS OF KNOWLEDGE  
AT YOUR SERVICE**



# NEW PRODUCT GUIDE 2023



GENERATIONS OF KNOWLEDE  
AT YOUR SERVICE

CELEBRATING



OF EXCELLENCE

PROUDLY SERVICING OUR  
CUSTOMERS SINCE

1973



## HYDRAULIC DOUBLE ACTING RAM HEAVY DUTY

Barrel Inner: **90mm.**  
Barrel Outer: **100mm.**  
Pin Hole: **30mm.**  
Ports: **3/8in BSP.**  
Rod: **50mm.** Working pressure:  
180 Bar - 2610 PSI.  
Max pressure: 250 Bar - 3625 PSI.

<b>G19923</b>	20in Stroke 305mm
<b>G19924</b>	22in Stroke 363mm
<b>G19925</b>	24in Stroke 410mm

## G19948



## STANDARD DUTY CAT 2 x CAT 2 HYDRAULIC TOP LINK PAINTED WITH ANTI CREEP

Size: **18in.**  
Barrel Inner: **60mm.**  
Barrel Outer: **70mm.**  
End 1 Type: **25.4mm.**  
Open Centre: **635mm.**  
Closed Centre: **460mm.**  
Rod: **40mm.**  
Pre-assembled with anti-creep safety device to prevent damage or injury in a case of hose bursting.



## 2 STAGE STANDARD DUTY TRAILER RAM

Barrel Outer: **105mm.**  
Rod: **44.45mm.**  
G20188: Closed Centre - **711mm.**  
G20189: Closed Centre - **914mm.**  
Pin Hole: **25.8mm.**  
Ports: **1/2in BSP.**  
Rod: **44.45mm.** Working pressure: 180 Bar - 2610 PSI.  
Max pressure: 250 Bar - 3625.

<b>G20188</b>	Stroke 1014mm
<b>G20189</b>	Stroke 1363mm

## G20191



## 2 STAGE HEAVY DUTY TRAILER RAM

Barrel Outer: **120mm.**  
Stroke: **1370mm.**  
Closed Centre: **914mm.**  
Pin Hole: **31.75mm.**  
Ports: **1/2in BSP.**  
Rod: **50mm.**  
Working pressure: 180 Bar - 2610 PSI. Max pressure: 250 Bar - 3625 PSI. Finish: Self colour. Low speed for agricultural use.

## G20193



## 3 STAGE STANDARD DUTY TRAILER RAM

Barrel Outer: **105mm.**  
Stroke: **1993mm.**  
Closed Centre: **924mm.**  
Pin Hole: **25.8mm.**  
Ports: **1/2in BSP.**  
Rod: **44.45mm.**  
Working pressure: 180 Bar - 2610 PSI. Max pressure: 250 Bar - 3625 PSI. Finish: Self colour. Suitable for all trailer manufacturers.



## 3 STAGE HEAVY DUTY TRAILER RAM

Barrel Outer: **120mm.**  
Rod: **50mm.**  
G20196: Closed Centre - **914mm.**  
G20199: Closed Centre - **1092mm.**  
Pin Hole: **31.75mm.**  
Ports: **1/2in BSP.**  
Working pressure: 180 Bar - 2610 PSI. Max pressure: 250 Bar - 3625. Finish: Self colour.

<b>G20196</b>	Stroke 2032mm
<b>G20199</b>	Stroke 2449mm

## G19805



### GENFITT ECO WIDE ANGLE PTO SHAFT COMPLETE

End Type 1: **1 3/8in - 6 Spline.**  
 End Type 2: **1 3/8in - 6 Spline.**  
 Series: **T8.**  
 Size 2: **35 x 106.5mm, 30.2 x 106mm.**  
 Universal Joint: **35 x 106.5mm.**  
 Tube Profile: **Star.**  
 Length: **1500mm.**  
 Inner Tube Size: **47.4 x 37.1mm.**  
 Outer Tube Size: **56.8 x 46.4mm.**



### GENFITT ECO WIDE ANGLE PTO SHAFT COMPLETE WITH SHEARBOLT

Shearbolt: **12mm.**  
 G19806: **S80 x 1 3/4in 6 Spline.**  
 G20129: **S80 x 1.3/8in 6 spline.**  
 G20130: **S80 1.3/4in 20 Spline.**  
 Series: **T8.**  
 Length: **1500mm.**

<b>G19806</b>	S80 x 12 SB
<b>G20129</b>	S80 x 12 SB
<b>G20130</b>	S80 x 12 SB

## G20136



### GENFITT ECO PTO SHAFT WITH SHEARBOLT

End Type 1: **1 3/8in - 6 Spline.**  
 End Type 2: **1 3/8in - 6 Spline.**  
 Series: **T8.**  
 Shearbolt: **12mm.**  
 Universal Joint: **35 x 106.5mm.**  
 Tube Profile: **3 Corner.**  
 Length: **1700mm.**  
 Inner Tube Size: **5 x 53.6mm.**  
 Outer Tube Size: **4 x 62.7mm.**  
 90° hinge angle joint when not in operation.

## G20137



### GENFITT ECO PTO SHAFT STANDARD

End Type 1: **1 3/8in - 6 Spline.**  
 End Type 2: **1 3/8in - 6 Spline.**  
 Series: **T8.**  
 Universal Joint: **35 x 106.5mm.**  
 Tube Profile: **3 Corner.**  
 Length: **1700mm.**  
 Inner Tube Size: **5 x 53.6mm**  
 Outer Tube Size: **4 x 62.7mm**  
 High power transmission capacity joint with small swing diameter.

## G20347



### GENFITT ECO PTO SHAFT WITH SHEARBOLT

End Type 1: **1 3/8in - 6 Spline.**  
 End Type 2: **1 3/8in - 6 Spline.**  
 Series: **T6.**  
 Shearbolt: **10mm.**  
 Universal Joint: **30 x 92mm.**  
 Tube Profile: **3 Corner.**  
 Length: **1700mm.**  
 Inner Tube Size: **5.04 (4 x 45mm).**  
 Outer Tube Size: **6.03 (4 x 54mm).**  
 High power transmission capacity joint with small swing diameter.

## G20344



### GENFITT PTO WIDE ANGLE UNIVERSAL CROSS JOINT

Size: **(30.2 x 106mm / 35 x 106.4mm)**  
 Series: **T8.**  
 High quality needle bearing.  
 Floating discs for increased service life. The central lubrication system supplies the joint with sufficient grease.  
 Lubrication required every 8 hours.

# PRODUCT GUIDE 2023

**G20345**



## GENFITT PTO INNER TUBE

Series: **T8.**  
 Tube Size: **8.04 (5 x 53.6mm).**  
 Tube Profile: **3 Corner.**  
 Replacement 3 corner profile  
 inner tubing. Suitable for  
 complete PTO shafts.  
**Supplied in 1m length.**

**G20346**



## GENFITT PTO OUTER TUBE

Series: **T8.**  
 Tube Size: **8.03 (4 x 62.7mm).**  
 Tube Profile: **3 Corner.**  
 Replacement 3 corner profile  
 outer tubing. Suitable for  
 complete PTO shafts.  
**Supplied in 1m length.**

**G20139**



## GENFITT ECO PTO WIDE ANGLE PULL COLLAR REPAIR KIT

Suitability: **T40, T60 Series.**  
 Repair kit for pull collar 6  
 spline ends on Genfitt ECO  
 wide angle PTO shafts.

**G20052**



## PTO STAR INNER TUBING

Series: **T8.**  
 Tube Size: **47.4 x 37.1mm.**  
 Tube Profile: **Star.**  
 Replacement star profile for  
 complete PTO shafts.  
**Supplied in 1m length.**

**G20053**



## PTO STAR OUTER TUBING

Series: **T8.**  
 Tube Size: **56.8 x 46.4mm.**  
 Tube Profile: **Star.**  
 Replacement star profile for  
 complete PTO shafts.  
**Supplied in 1m length.**



## PTO SHEARBOLT YOKE END

End Type 1: **1 3/8in - 6 Spline.**  
 Series: **T4.**  
 Universal Joint:  
 G20054: **27 x 75mm.**  
 G20055: **30 x 80mm.**  
 G20056: **30 x 92mm.**  
 G20057: **30 x 80mm.**

<b>G20054</b>	No. 4 - 8mm SB
<b>G20055</b>	No. 5 - 10mm SB
<b>G20056</b>	No. 6 - 10mm SB
<b>G20057</b>	No. 8 - 12mm SB





## AGRI TOPPER GEARBOX

G19967 OEF Ref: **9.267.806.00.**

G19969 OEF Ref: **9.205.880.00.**

G19972 OEF Ref: **9.205.871.00.**

Replacement gearbox suitable for a range of pasture toppers. Models include Malone, Conor, Belmac, Nugent, Rossmore, Bridgeway, Flemming.

**G19967** L/R - 1:1

**G19969** L/L - 1:1.92

**G19972** L/R - 1:1.47

## G18576



## KRONE TINE CONDITIONER (NEW TYPE)

OEM: **Krone.**

OEM Ref: **200350360.**

Replacement Conditioner Flail/ Tine (New Type) for Krone mower Big M and Easycut models.

## G18577



## KVERNELAND/TAARUP TINE CONDITIONER

OEM: **Kverneland/Taarup.**

OEM Ref: **90276100.**

Replacement Conditioner Flail/ Tine for Kvereland / Taarup Mowers.



## TAARUP CONDITIONER TINE

OEM: **Taarup.**

OEM Ref: **39.113.900.**

Taarup conditioner tine flail/ finger. RH & LH replacement tines.

**G20395** 39.113.900 R/H

**G20396** 39.113.000 L/H

## G20279



## KUHN SKID

OEM: **Kuhn / John Deere.**

OEM Ref: **56809300.**

Suits: 131, 228, 331, 381, 388, 488, FC283, FC883, GMD 24, GMD 500, GMD 600.

Replacement skids suitable for Kuhn / John Deere mowers.

## G20280



## KUHN MOWER WEAR PLATE

OEM: **Kuhn/John Deere.**

OEM Ref: **56808510/DC49304.**

Replacement wear plate suitable for Kuhn / John Deere mowers.

Suits: 131, 228, FC 243, FC 283, GMD 500, GMD 600, GMD 700.

## **G20164**



### **TAARUP/KV ROTARY STUD**

OEM: **Kverneland/Taarup.**  
OEM Ref: **5640300.**  
Thread Size: **M12.**  
Replacement Conditioner Flail/  
Tine for Kverneland / Taarup  
Mowers.

## **G20410**



### **MCHALE BALER PICK UP TINE**

OEM: **Fusion 1, 2, 3, 4, F5000  
series.**  
OEM Ref: **CTN00008.**  
Thickness: **5.2mm.**  
Length: **19mm.**  
Inner Curl Diameter: **28.5mm.**  
Finish: **Powdered coated green  
RAL6010.**

## **G20281**



### **KVERNELAND WEAR PLATE**

OEM: **KV / Taarup.**  
OEM Ref: **KT55676100.**  
Replacement wear plate suitable  
for Kverneland / Taarup mowers.  
Suitability: Kverneland / Taarup  
3000 Series, 3124, 3128, 3132,  
3500F Series, 3532F, 5000 Series,  
5090.

## **G20394**



### **TOP HAT FLIGHT WEAR PLATE**

OEM: **Kuhn/John Deere.**  
OEM Ref: **DC35841.**  
Replacement weld on top hat  
flight wear plate suitable for  
John Deere, Kuhn, Taarup  
mowers.

## **G18573**



### **JOHN DEERE TINE HANGER**

OEM: **Kuhn/John Deere.**  
OEM Ref: **CC19240.**  
John Deere conditioner tine  
hanger. Suitable for tines  
G18571 & G18572.



## **G18574**



### **JOHN DEERE TINE BUSHING**

OEM: **John Deere.**  
OEM Ref: **CC26358.**  
John Deere conditioner tine  
bushing. Suitable for tines  
G18571 & G18572.



**G19101**



## JOHN DEERE WELD ON LUG

OEM: **Kuhn/John Deere.**  
OEM Ref: **CC31681/05901200.**  
John Deere conditioner mower weld on lug. Suitable for John Deere 1360 1366 models.

**G20165**



## HOWARD E SERIES BLADE SET

Replacement standard rotavator blade set suitable for Howard E series. Dimensions: 57mm hole centres. 12.7mm hole diameter. 80mm wide x approximately 200mm long. Thickness: 7mm.  
**Sold in sets: 1 unit = x10LH & x10RH blades**

**G19844**



## HERTELL PRIMING PUMP B-400 WITH HYDRAULIC MOTOR

50% vacuum rate: **450 L/min.**  
Hydraulic drive operation.  
B Pumps are designed for vacuum equipment where a vacuum rate of at most 50 kPa is required continuously.  
Equipped with a ventilator to guarantee one optimal working temperature.



## RIV FLANGED TUBE LEVEL INDICATOR

Length: **100mm.**  
Flange plate 100mm both ends.

**G20103** 100 x 1300mm

**G20104** 100 x 1500mm

**G20363**



## O-RING FOR HERTELL LAU 150 VALVE NUMBER 17

OE Ref: **02LA150017.**  
Suitability: **G16232**  
Replacement outer flange O-ring for 6inch Hertell gate valve.

**G20365**



## HERTELL LAU 50 PAPER GASKET NUMBER 6

OE Ref: **02LA150017.**  
Suitability: **G16232**  
Replacement gasket for 6inch Hertell gate valve. Fitment between the top cover and bottom housing.



## G20382



### **SUPER ELASTIC HOSE FOR DRIBBLE BAR**

Sold per Roll: **50m.**

**Priced by metre.**

Working Pressure: **5 Bar.**

Bursting Pressure: **15 Bar.**

Length: **50m Coil.**

Outer Diameter: **45.8mm.**

Inner Diameter: **40mm.**

Translucent UV resistant hose with a green spiral helix embedded in a superelastic flexible PVC.



### **HEAVY DUTY RSJ HANGER**

Supplied fully assembled and ready to use. Galvanised finish. Provides support in a variety of applications, perfect for use at home or on the farm. Suitable for garden and general farm gates depending on the weight / duty.

### **G19935 COMING SOON**

**G19935** Top

**G19936** Bottom

## G20116



### **HANGER SQUARE TO HOOK BOLT**

Full length: **13in.**

Pin diameter: **19mm.**

Gate hanger specially designed for timber posts with square profile shaft and threaded bar.

Galvanised finish for extra resistance to corrosion. This eliminates the need to bend any rod or iron in order to hold a gate. All steel construction.



### **LOOP THREADED HANGER**

Ensure your gate is safely secured with this fully threaded gate hanger. Designed to prevent gate swing over. Supplied with double nut and washers. Can be mounted directly to the gate. Finish: Zinc plated.

**G20334** 305mm

**G20335** 350mm

**G20336** Loop Only

## G20142



### **GENFITT POINTED SHOVEL**

Size: **48in.**

Open socket pointed shovel pressed from high quality steel fitted with a graded wooden shaft.

## G20143



### **GENFITT SQUARE SHOVEL**

Size: **48in.**

Open socket square shovel pressed from high quality steel fitted with a graded wooden shaft.

## **G20144**



### **GENFITT ALUMINIUM GRAIN SHOVEL**

Size: **48in.**

Open socket square grain shovel pressed from high quality aluminium and fitted with a graded wooden shaft. Comes with a straight handle.

## **G20145**



### **GENFITT SPADE**

Size: **48in.**

Open socket spade pressed from high quality steel and fitted with a graded wooden shaft.

## **G20146**



### **GENFITT 3 PRONG FORK**

Size: **48in.**

Open socket 3 prong fork made from high quality steel and fitted with a graded wooden shaft.

## **G20147**



### **GENFITT 4 PRONG FORK**

Size: **48in.**

Open socket 4 prong fork made from high quality steel and fitted with a graded wooden shaft.

## **G20148**



### **GENFITT STARTER HOSE**

Size: **1/2in 15m.**

The all purpose water hose range offers outstanding low temp. characteristics combined with flexibility. Designed for a variety of watering applications. Suitable for general purpose water applications, including sports grounds, agricultural and horticultural and domestic garden applications.

Working Pressure: **10 bar.**

Thickness: **2.3mm wall.**

Outer Diameter: **17mm.**

Inner Diameter: **12.5mm / 1/2in.**

# PRODUCT GUIDE 2023

## G19894



### GENFITT UNIVERSAL TRACTOR SEAT COVER

Both waterproof and hard wearing, this tractor seat cover is universal to most standard based tractor seats. Provides the ultimate protection for your tractor seat from dirt, dust, and splashes of oil. Quick and easy to fit.



### GENFITT 5 LITRE PAINT

A range of air drying enamels designed for the coating and refurbishing of agricultural, horticultural and construction machinery components. The most popular agricultural tractor brand colours and finishes included.

<b>GPT05001</b>	FORD TRACTOR BLUE 5L
<b>GPT05002</b>	MF STONELEIGH GREY 5L
<b>GPT05003</b>	MF SILVER MIST 5L
<b>GPT05004</b>	MF SUPER RED 5L
<b>GPT05005</b>	MATT BLACK 5L
<b>GPT05006</b>	GLOSS WHITE 5L
<b>GPT05007</b>	JOHN DEERE GREEN 5L



### GENFITT 1 LITRE PAINT

A range of air drying enamels designed for the coating and refurbishing of agricultural, horticultural and construction machinery components. Based on a pure drying, oil modified alkyd blend with urethane in mixed hydrocarbon solvent. Suitable for finishing or refurbishing machinery components to give a high quality durable finish. Optimum durability is achieved when used in conjunction with primers.

<b>GPT01001</b>	FORD TRACTOR BLUE 1L
<b>GPT01002</b>	NEW HOLLAND BLUE 1L
<b>GPT01003</b>	FORD GREY 1L
<b>GPT01004</b>	MF STONELEIGH GREY 1L
<b>GPT01005</b>	MF CHARCOAL GREY 1L
<b>GPT01006</b>	MF SILVER MIST 1L
<b>GPT01007</b>	MF SUPER RED 1L
<b>GPT01008</b>	MATT BLACK 1L
<b>GPT01009</b>	GLOSS BLACK 1L
<b>GPT01010</b>	GLOSS WHITE 1L
<b>GPT01011</b>	MCHALE GREEN 1L
<b>GPT01012</b>	JOHN DEERE GREEN 1L
<b>GPT01013</b>	JOHN DEERE YELLOW 1L
<b>GPT01014</b>	JCB YELLOW 1L
<b>GPT01015</b>	HITACHI ORANGE 1L

# PRODUCT GUIDE 2023



## GENFITT AEROSOL PAINT

A range of air drying enamels designed for the coating and refurbishing of agricultural, horticultural and construction machinery components. The most popular agricultural tractor brand colours and finishes included. Based on a pure drying, oil modified alkyd blend with urethane in mixed hydrocarbon solvent.

<b>G20071</b>	KANE TRAILER BLUE 400ml
<b>G20072</b>	REDROCK RED 400ml
<b>G20073</b>	MAJOR GREEN 400ml
<b>G20074</b>	KUHN ORANGE 400ml
<b>G20075</b>	KUHN GREY 400ml
<b>G20076</b>	SLURRYKAT RED 400ml

## FLAT HEAD TOP LINK PIN



Flat Head or Ram Top Link Pin. Designed to connect components that rotate or swivel. Commonly used on agricultural machinery, motor engines, or as a replacement secure pin for jack stands. Resistant to vibration. Comes with 10mm thick collar/shoulder. Finish: Zinc plated. Material: EN8.

<b>G20169</b>	1 x 4in
<b>G20170</b>	1 x 5in
<b>G20171</b>	1 x 6in
<b>G20173</b>	1.1/8 x 4in
<b>G20174</b>	1.1/8 x 5in
<b>G20175</b>	1.1/8 x 6in
<b>G20176</b>	30mm x 5in
<b>G20177</b>	30mm x 6in
<b>G20178</b>	1.1/4 x 5in
<b>G20179</b>	1.1/4 x 6in



## TOP LINK PIN

Designed to hold the top link in place to the tractor or implement. Made to resist strain and pressure. Strong and weather resistant. Comes in a range of sizes to suit your needs. Finish: Zinc plated. Material: EN8.

<b>G20180</b>	5 x 1.1/8in
<b>G20182</b>	6 x 1.1/8in
<b>G20183</b>	5 x 30mm
<b>G20184</b>	6 x 30mm

## G20364



## UNBRAKED SUSPENSION UNIT SET

Capacity: **350kg.**  
Studs: **4.**  
PCD: **4in.**  
Thread Size: **M10.**  
4 stud unbraked suspension unit set with 4inch PCD.

## G20134



## 4 STUD AXLE PCD 98mm PCD

Shaft Size: **35 x 35 x 200mm.**  
Capacity: **500kg.**  
Studs: **4 x 12mm.**  
PCD: **98mm.**  
Max Speed: **40km.**



## **G20133**



### **4 STUD KNOBBY TYRE WHEEL ASSEMBLY**

Tyre Size: **22 x 11 x 8**.  
 Studs: **4**.  
 PCD: **98mm**.  
 Tyre style: Grass knobby style. Not recommended for road use.

## **G20127**



### **PLASTIC WHEEL CHOCK**

Dimensions: **320 x 120 x 160mm**.  
 Capacity: **500kg**.  
 Colour: **Black**.  
 Secure motor vehicles and trailers by blocking the wheels so they cannot roll away. Additional protection for parked trailers. The bottom surface has been equipped with a grip which facilitates the mounting process.

## **G20128**



### **METAL WHEEL CHOCK HOLDER**

Dimensions: **200 x 170mm**.  
 Material: **Galvanised metal**.  
 Galvanised metal holder for AL-KO wheel chock ref G20127.

## **G20349**

**AL-KO**



### **WHEEL BEARING KIT FOR ALKO**

Width: **58mm**.  
 Outer Diameter: **60mm**.  
 Inner Diameter: **30mm**.  
 Double ball bearing kit suitable for Alko type 4 stud hubs. Suitable for: G3080, G19543, G19520 & G19521. Bearing and seal kit for x 1 complete hub Supplied with 1 bearing, hub cap and nut.

## **G20242**

**KNOTT**



### **KNOTT 750KG CAST COUPLING HEAD**

Ball Head: **50mm**.  
 Capacity: **750kg**.  
 Variant: **2 bolt**  
 Maximum towing capacity: 750kg (within the EU).



### **MCANAX COMBINATION SPANNERS**

Drop-forged, hardened vanadium and chrome plated. Fully polished mirror finish for added corrosion resistance. Suitable for professionals and DIY enthusiasts.

<b>MX1100011</b>	34mm
<b>MX1100012</b>	36mm
<b>MX1100013</b>	38mm
<b>MX1100014</b>	41mm
<b>MX1100015</b>	46mm



# PRODUCT GUIDE 2023

## **MX21000000**



### **MCANAX 18 PIECE COMBINATION SPANNER SET**

Sizes: **6-22,24mm.**  
Drop Forged Chrome Vanadium Steel. Mirror Polished Finish for Corrosion Resistance. Hardened & Tempered. Confirms to DIN 3113.

## **MX21000003**



### **MCANAX 12 PIECE HIGH TORQUE COMBINATION SPANNER SET**

Sizes: **6-14,17,19,22mm.**  
Drop Forged Chrome Vanadium Steel. Mirror Polished Finish for Corrosion Resistance. Hardened & Tempered. Confirms to DIN 3113B.

## **MX21000004**



### **MCANAX 6 PIECE RING SPANNER ETRX SET**

Sizes: **E6xE8 - E20xE24.**  
Drop Forged Chrome Vanadium Steel. Mirror Polished Finish for Corrosion Resistance. Hardened & Tempered. Confirms to DIN 3113B.

## **MX21000005**



### **MCANAX 6 PIECE EXTRA LONG COMBINATION SPANNER SET**

Sizes: **8mm, 10mm, 12mm, 13mm, 17mm, 19mm.**  
Drop Forged Chrome Vanadium Steel. Mirror Polished Finish for Corrosion Resistance. Hardened & Tempered. Extra Long Lengths.

## **MX21000033**



### **MCANAX STEEL SHAFT CLAW HAMMER**

Size: **16oz.**  
Multipurpose hammer. Provides the best balance and agility in all your projects. Features a high grip handle, ergonomic shape and forged steel head. Maintain a better control over it when striking nails. Allows you do more tasks efficiently. Lighter than traditional hammers.



### **MCANAX FIBREGLASS CLAW HAMMER**

A lightweight tool that will be useful for around the home. Ideal for the small jobs. Featuring a polished head and claw. Features a fibreglass shaft with a textured nylon grip. Ensures comfort and control.

**MX21000035** 16oz

**MX21000036** 20oz

# PRODUCT GUIDE 2023



## MCANAX WATER PUMP PLIERS

An essential toolbox addition for professionals and enthusiasts alike. Corrosion resistant. Drop Forged Chrome Vanadium Steel. Hardened Locating Mechanism & Jaws. Comfortable Vinyl Handles.

<b>MX2100047</b>	10in
<b>MX2100048</b>	12in

## MX2100049



## MCANAX FENCING PLIERS

An essential tool for putting up new fences or maintaining old ones. Drop Forged. Hardened & Tempered. Suitable for nailing staples. Comfortable vinyl handles. Strong, durable & reliable fencing tool.

## MX2100054



## METAL HACKSAW

Size: **300mm**

Suitable for cutting wood, plastics and metals. Carbon steel frame. Rigid Box Frame Design. Blade Adjustment allows 90 degree cutting. Comfortable Non Slip Plastic Handle.

## MX2100055



## METAL JUNIOR HACKSAW

Size: **150mm**

Perfect for cutting materials such as metal or plastic safely and efficiently. Rigid Box Frame Design. Comfortable Ergonomic Non Slip Plastic Handle. Commonly used in DIY, construction and industrial settings.

## MCANAX WRECKING BAR

Ideal for removing nails, dismantling, prising and opening. Made from EN9 Hex Steel. Powder Coated with Ground Claw & ChiselRed, rust-resistant finish. Angled Chisel End for Leverage.

<b>MX2100060</b>	450mm
<b>MX2100061</b>	600mm
<b>MX2100062</b>	750mm

## MX2100063



## MCANAX PRY BAR

Size: **10in.**

The contoured bar makes pulling nails, prying and lifting easier. The flat surface allows users to cleanly pry moulding and trim, thus reducing material damage. Solid Forged. Hardened & Tempered Steel. Powder Coated with Ground Claw & Chisel.

# PRODUCT GUIDE 2023

## **MX2100064**



### **MCANAX 4 PIECE PRY BAR SET**

Sizes: **152.5mm, 305mm,  
457mm, 609.5mm.**

Solid Forged. Hardened & Tempered Steel. Powder Coated with Ground Claw & Chisel with Ground Claw & Chisel.

## **MX2100090**



### **MCANAX 4 WAY CROSS WHEEL BRACE**

Carbon steel, drop-forged and fully heat-treated. Suitable for most vehicles. Made from EN8 Steel. Chrome Finsh. Material: EN8 Steel.

## **MX2200004**



### **MCANAX ANVIL**

Capacity: **25kg.**  
Drop-forged, high grade steel. Round horn and the flat horn are used for smoothing, bending and shaping. The hardy hole and pritchel hole are useful for punching and twisting. Heavy Cast iron Body. Polished Face. Powder Coated Finish.

## **IW0060002**



### **IRWIN SNAP OFF KNIFE**

The IRWIN Snap-Off 18mm snap off knife featuring a self locking blade adjustment together with a removable end-cap which can assist breakage of each blade segment. Available in a display pack of 24.

## **IW0590001**



### **IRWIN MARPLES MS500 PROTOUCH ALL PURPOSE 3 PACK WOOD CHISEL**

These chisels have a large metal striking cap to withstand hammer impacts, prolong the life of the handle and prevent mushrooming. ProTouch™ handles are designed to provide an extra comfort grip and also reduce vibrations and hand fatigue.

## **IW0590002**



### **IRWIN MARPLES MS500 PROTOUCH ALL PURPOSE 5 PACK WOOD CHISEL**

Sizes: **6, 10, 13, 19 and 25mm  
(1/4, 3/8, 1/2, 3/4 and 1in).**

One-piece blade forging gives added strength and durability. Made from special tool steel which ensures a much sharper cutting edge for quicker and easier operation.

# PRODUCT GUIDE 2023

## **G20337**



### **WELDER 160AMP STARTER PACK**

Complete with: **Inverter Welder (MMA & Lift Tig). Auto Darkening Welding Helmet 2.5kg box of 3.2mm x 350mm Mild steel type E6013 Electrodes.** Provides real-time diagnostics to ensure your welds are going smoothly. Electrode Diameter: 2.5mm, 3.25mm, 4mm. Welds under optimal conditions.

## **G20338**



### **WELDER 200AMP STARTER PACK**

Complete with: **Inverter Welder (MMA & Lift Tig). Auto Darkening Welding Helmet 2.5kg box of 3.2mm x 350mm Mild steel type E6013 Electrodes.** Provides real-time diagnostics to ensure your welds are going smoothly. Electrode Diameter: 2.5mm, 3.25mm, 4mm. Welds under optimal conditions.

## **MX4100004**



### **MCANAX 200AMP MIG WELDER**

MIG, MMA & LIFT TIG Functions. VRD function built in. Light weight design make it easy to carry. Adopt advanced single IGBT technology, increased reliability. 2T/4T mode. Arc force, hot start and anti-stick built it. Lower cost operation, more portable, more compact, superior output.



### **MILD STEEL WELDING ROD**

These electrodes are suitable for all welding positions, including vertical-down position. Easy slag removal, striking and re-striking along with a finely rippled bead surface make these easy to use.

**MX4100060** 10G - 3.2mm

**MX4100061** 12G - 2.5mm

## **MX4100050**



### **POLYCARBONATE DARK SAFETY VISOR**

Polycarbonate face visor/ screen. Yellow head mounting browguard. Shade 5 visor. Visor dimensions: 8in x 15.5in x 1.2mm. Not recommended for welding.

## **G20339**




### **CLEAR SAFETY GLASSES**

Anti-dust and anti-impact glasses. Prevents injury to end users eyes when working with any type of debris or dust. Clear lens and anti-scratch. Each safety glass comes with a protection fabric bag. EN166 B rated.



## OUR NEW GENFITT AIR COMPRESSOR

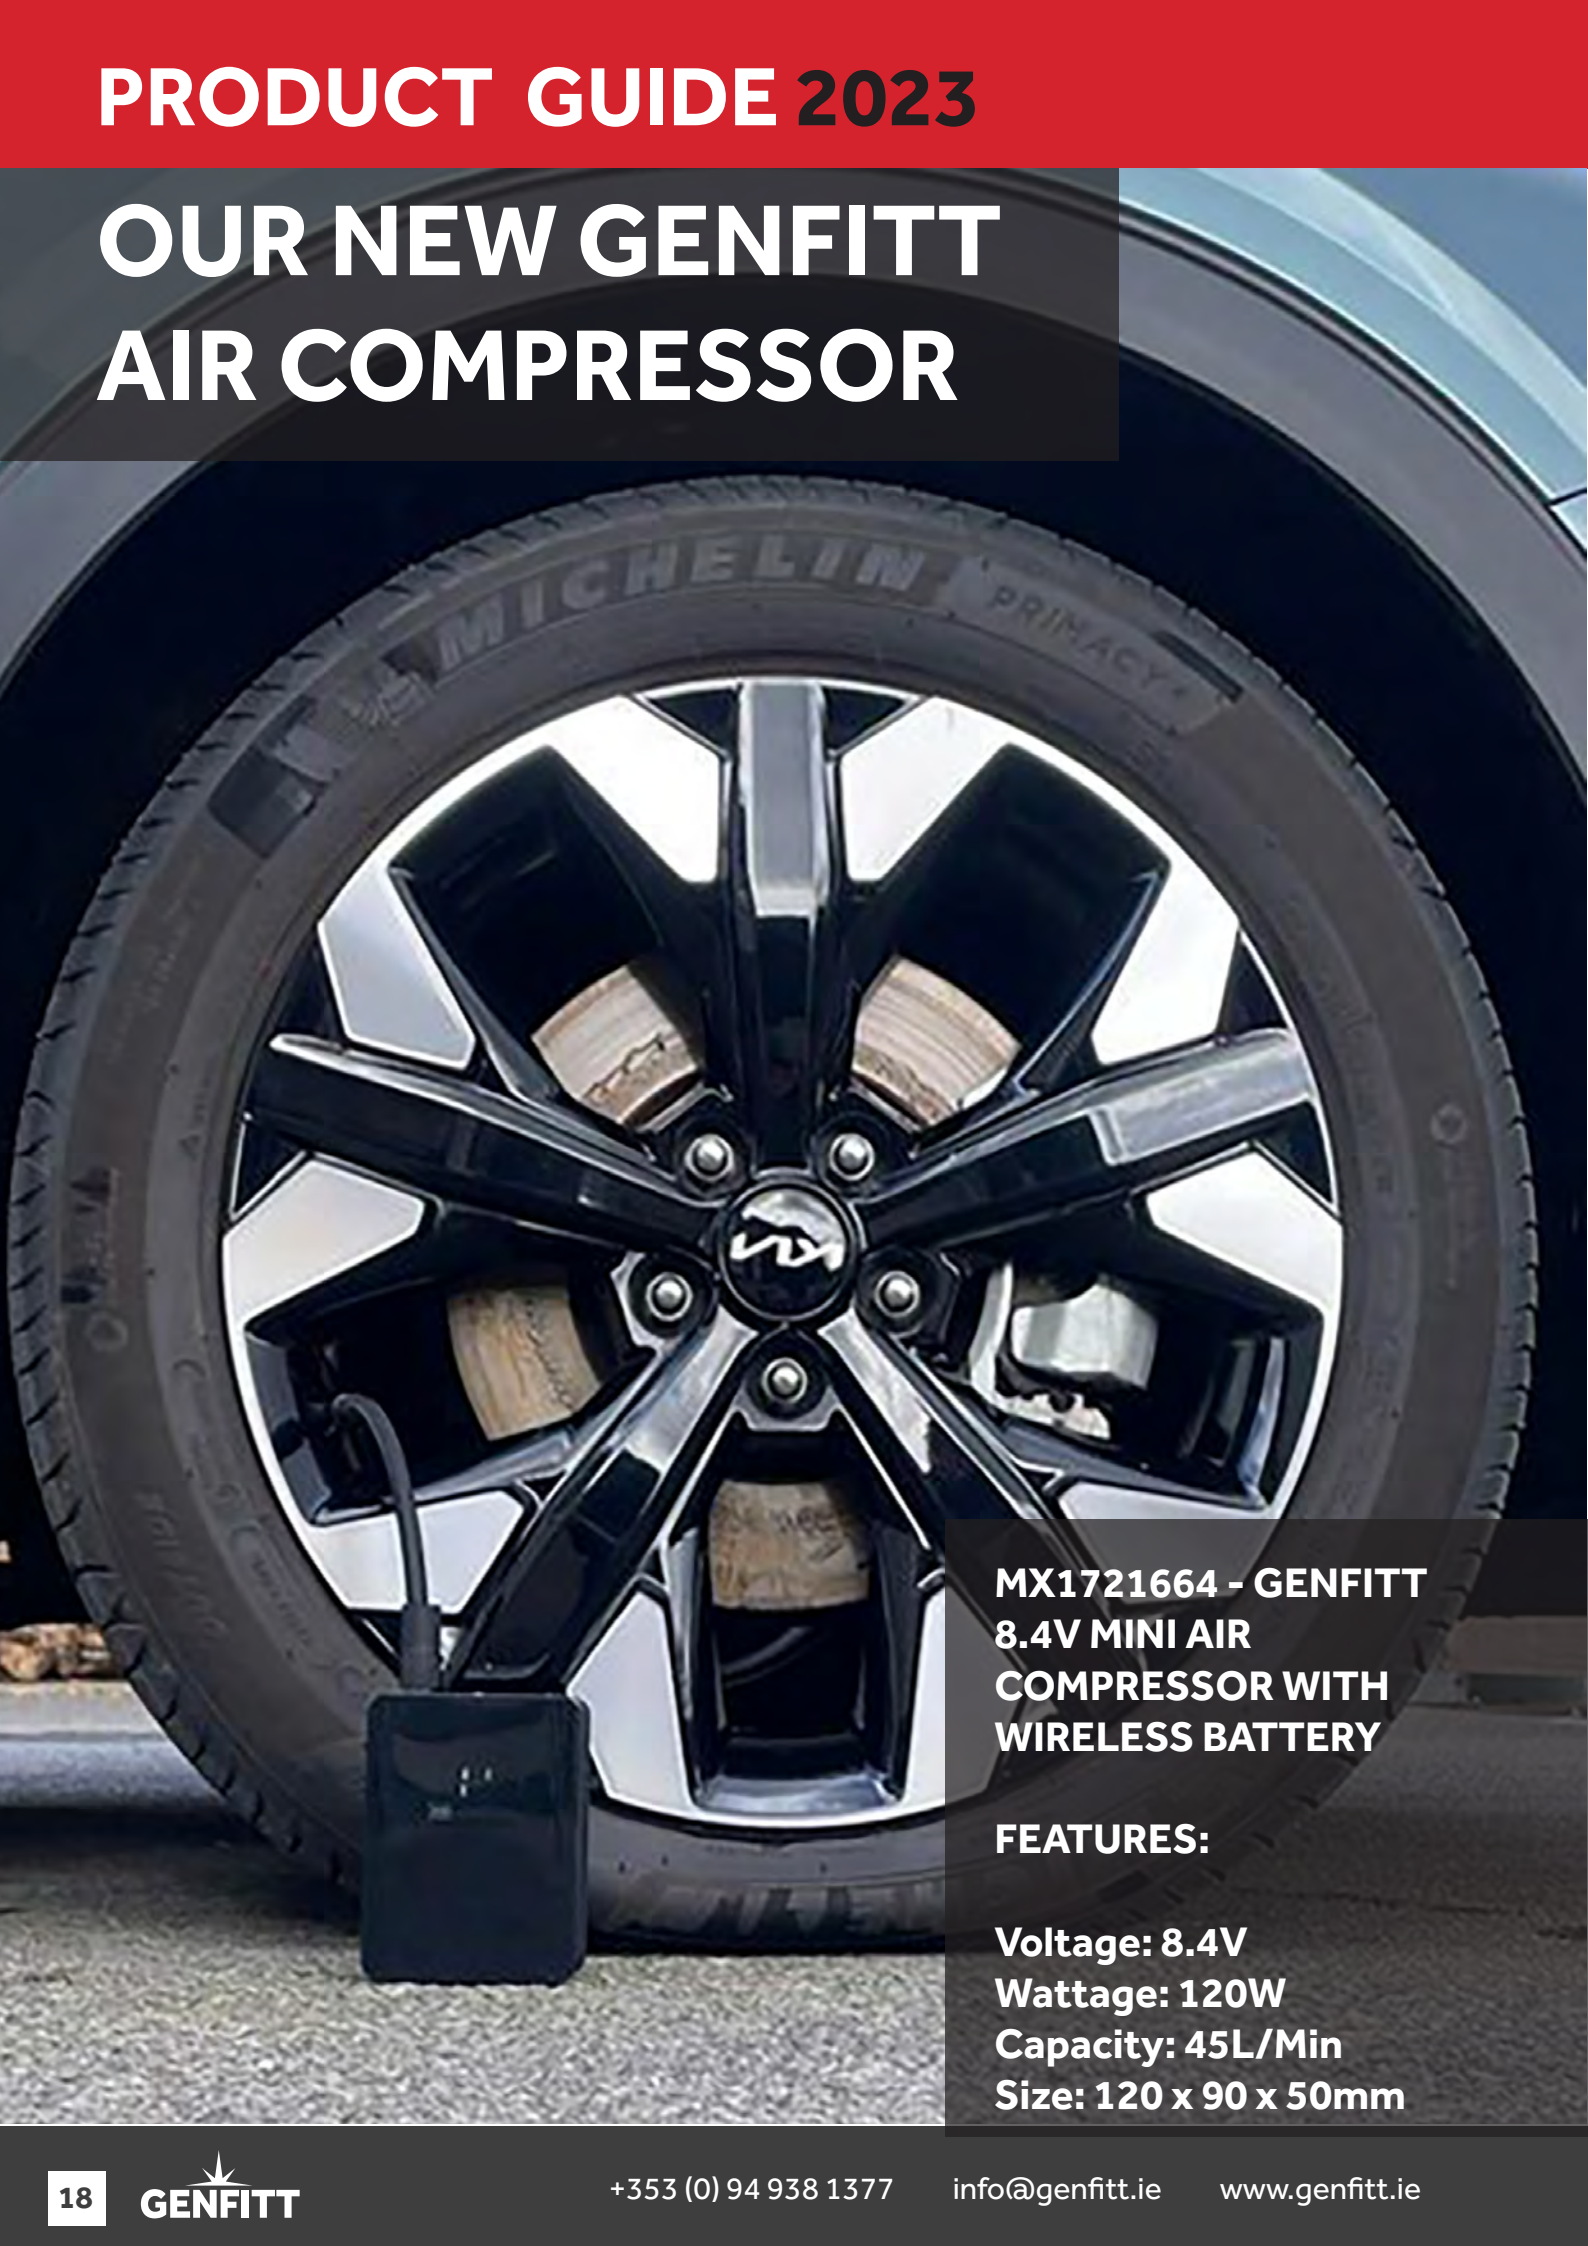

**MX1721664 - GENFITT  
8.4V MINI AIR  
COMPRESSOR WITH  
WIRELESS BATTERY**

### **FEATURES:**

**Voltage: 8.4V  
Wattage: 120W  
Capacity: 45L/Min  
Size: 120 x 90 x 50mm**



# PRODUCT GUIDE 2023

## G20340



### GREY SAFETY GLASSES

Anti-dust and anti-impact glasses. Prevent injury to end users eyes when working with any type of debris or dust. Grey lens and anti-scratch. Each safety glass comes with a protection fabric bag. EN166 B rated.

## MX4100052



### GOLD MIG WELDERS GAUNTLET GLOVES

Premium gold 16in MIG welding glove. Kevlar Stitched. Designed for MIG welding. Sold in pairs. Conforms to: EN 420, EN 388, EN 12477

## G20274



### ORANGE GRIP GLOVES

Size: **10.**  
Cotton dipped orange latex grip glove. Standard: EN388.

## G20275



### YELLOW GRIP GLOVES

Size: **10.**  
Power rigger yellow glove. Cat II. CE Approved.



### BLACK POWDER NITRILE GLOVES

Size: **100 Pieces.**  
Full Grip Powder Black Nitrile Gloves supplied in 100 glove packets. Special 3D grip on the whole palm and fingers for improved grip. Suitable for heavy duty usage.

**G20523** Large

**G20524** X Large



### ORANGE POWDER NITRILE GLOVES

Size: **50 Pieces.**  
Full Grip Powder Free Orange Nitrile Gloves supplied in 50 glove packets. Special 3D grip on the whole palm and fingers for improved grip. Suitable for heavy duty usage.

**G20525** Large

**G20526** X Large



## MCANAX GREEN JERRY CAN WITH SPOUT

Approved for use on U.N vehicles. Strong safe construction with durable green powder paint finish. Hi-grade phosphate treated steel Interior anti-corrosion coated.

<b>MX1650040</b>	5 Litre
<b>MX1650041</b>	10 Litre
<b>MX1650042</b>	20 Litre

## MX1650043



## MCANAX SPOUT FOR GREEN JERRY CAN

Approved for use on U.N vehicles. Strong safe construction with durable green powder paint finish. Hi-grade phosphate treated steel. Suitable for MX1650040, MX1650041 & MX1650042.

## G20100



## DIESEL ADBLUE HOSE

Size: **1 Metre.**

Our Diesel Adblue Hose is manufactured from a compound containing nitrile. Offers excellent flexibility and kink resistance. Designed for the transportation of fuel oils with a low aromatic content. Including diesel, oil, kerosene, white spirit, Adblue and mineral based hydraulic oils.

## G20276



## 12V TRANSFER PUMP KIT WITH BRASS FITTINGS

Power: **175W.**  
Voltage: **DC 12V.**  
Pump rate: **40L/min.**  
Max Head: **10m.**  
Suction height: **2m.**  
Fittings size: **1 in.**  
Hose size: **1 in bore.**  
Hose Length: **4m.**  
Fittings included in kit: Adapter coupling & Brass check valve.

## MX1721662



## MCANAX HEAVY DUTY 12V AIR COMPRESSOR KIT

Power Supply: **12V DC.**  
Rated Current: **20A.**  
Cylinder Diameter: **2 x 30mm.**  
Max Pressure: **150PSI.**  
Capacity: **60L/Min.**  
Air hose: **4m.**  
Cord: **3m.**  
Accessories: 2 nozzle adapters and 1 sports needle.

## MX1721663



## MCANAX MINI 12V AIR COMPRESSOR KIT

Power Supply: **12V DC.**  
Rated Current: **20A.**  
Cylinder Diameter: **19mm.**  
Max Pressure: **150PSI.**  
Capacity: **20L/Min.**  
Air hose: **70cm.**  
3m cord with cigarette lighter plug Accessories: 2 nozzle adapters and 1 sports needle. With light and pressure gauge.

## **MX1721664**



### **GENFITT WIRELESS RECHARGEABLE BATTERY MINI AIR COMPRESSOR**

Voltage: **8.4V**

Fast inflation and easy operation. Convenient hand held portable mini air compressor will get you out of a fix. Suitable for cyclists, sports equipment, medium sized vehicles etc. Function: inflation (4 modes), sight light, auto stop charging setting.

## **G20491**



### **TYRE INFLATOR GAUGE FOR CARS**

Max Pressure: 4 Bar / 60PSI.

Thread Size: 1/4in BSP.

Analog gauge confirming to EU Directive 86/217/CEE, Accuracy 1.6%. Measures in PSI & BAR. Complete with 300mm (12in) flexible hose with straight chuck.



### **RETRACTABLE HOSE REEL**

Hose I.D. **3/8in.**

Suitable for compressed air, **20bar / 300PSI.**

Tested with a 4:1 safety rate. Supplied with a choice of 2 outlet connections: 3/8in BSPP male or 1/4in BSPP male. 1 metre supply hose, 1/4in BSPP male.

<b>G20140</b>	3/8in 9m
<b>G20141</b>	3/8in 17m

## **G20375**



### **SOLID TROLLEY WHEEL ASSEMBLY (STEEL CENTRE)**

Size: **320 x 68mm x 25mm.**

Capacity: **220kg.**

The Solid Trolley Wheel Assembly is a solid rubber tyre with steel centre. Allows you to manoeuvre heavier weight loads with ease. The solid rubber tyre with a steel centre gives a strong and sturdy support to the trolley.

## **G20376**



### **WHEELBARROW WHEEL BEARING & INSERTS (6202ZZ)**

Width: **90mm.**

Rim Diameter: **220mm.**

Outer Diameter: **390mm.**

Inner Diameter: **20mm.**

The heavy duty pumped wheelbarrow wheel assembly is ideal for carrying and lifting large objects.

## **G20374**



### **SOLID TROLLEY WHEEL ASSEMBLY (PVC CENTRE)**

Size: **330 x 67mm x 1in.**

Capacity: **200kg.**

This Solid Trolley Wheel Assembly with PVC Centre is a solid rubber tyre with a PVC plastic centre. The addition of the PVC centre improves the performance of the unit, increasing the number of cycles that can be produced before it wears out.

## G20377



### WHEELBARROW WHEEL PU FOAM FILLED WITH M10 AXLE

Size: **400 x 8.**

Width: **90mm.**

Rim Diameter: **227mm.**

This heavy duty PU Foam filled wheelbarrow wheel assembly is ideal for carrying and lifting large objects. Ideal for wheel barrows or other DIY creations, and offers exceptional value.

## G20378



### WHEELBARROW WHEEL PUMPED

Size: **400 x 8.**

Rim Diameter: **227mm.**

Outer Diameter: **395mm.**

Load capacity: **150kg.**

This wheel has a 20mm bearing inside diameter and comes with a steel zinc plated shaft 128mm long with 20mm outside diameter and M10 internal thread on both sides.

## MX0804031



### MCANAX HEAVY DUTY ONE HANDED GREASE GUN

Working Pressure: **4500PSI.**

Capacity: **14oz. / 400c.c.**

Bursting Pressure: **6000PSI.**

Suitability: **400g Push in Grease Cartridge.**

This grease gun is easy to use. Features a highly flexible high pressure nylon hose, steel hose, metallic straight spout and 4 jaw coupler.

## MX0804032



### MCANAX ONE HANDED GREASE GUN

Working Pressure: **1000PSI.**

Bursting Pressure: **3000PSI.**

Suitability: **500g Screw in Grease Cartridge.**

Perfect for getting into those tight spaces or places that your hand can't reach or fit. Comes with spring-retained plated steel lever and aluminium die cast body. A riveted plated steel link and standard duty.

## MX3100005



### DIAMOND DRY LIQUID TILE DRILL

Fits to Angle Grinder for drilling all types of tiles. 6mm and 8mm diamond heads. More sizes available on request.

**G19866**

M14 x 10mm

**G19867**

M14 x 12mm



### SNOW FOAM 5 LITRE CLEANER

Pre-wash non-contact cleaner. Ultra stable foaming properties for maximum effect. Does not strip wax, sealant or polish (neutral). Safe for use on most automotive paint finishes. Formulated specifically to offer maximum wetting, it rinses easily.



# PRODUCT GUIDE 2023

## MX3100008



### HEAVY DUTY AGRI CLEANER

Easily and gently removes road dirt and grime. Does not contain ingredients which accelerate metal corrosion. Safe on aluminium, metal surfaces, glass and rubber. Ideal for hot or cold pressure wash machines. Effective in hard and soft waters. Contains rinse off additive. Biodegradable.



### MCANAX POLYPROPYLENE TOOL BOXES

MCANAX plastic toolbox is constructed with a protective plastic base and edges for durability. Ideal for storing any hand tools and fixings. This toolbox comes in two sizes: mini & medium.

<b>MX1702002</b>	30 x 16 x 13cm
------------------	----------------

<b>MX1702003</b>	40 x 21 x 20cm
------------------	----------------

## MX1702006



### MCANAX METAL POLYPROPYLENE TOOL BOX

Constructed with metal walls and a protective plastic base and edges for durability. Ideal for storing any hand tools and fixings.

Size: **47 x 24 x 22 cm.**

## MX1702001



### MCANAX 5 TRAY CANTILEVER TOOLBOX

Features 5 trays. Ideal for storing any hand tools and fixings. Durable design made from 0.4mm metal.

Dimensions: **42cm L x 20cm W x 20cm H.**

## G20122



### QUICK RELEASE FOAM LANCE & TRIGGER KIT

Capacity: **1 Litre.**  
 Flowrate: **20LPM max.**  
 Size 1: **3/8in coupling.**  
 Size 2: **1/4in thread.**  
 Flow Rate: **20LPM maximum**  
 Maximum Pressure: **4000PSI**  
 Temperature: **60°C max.**  
 Inlet trigger: **3/8in plug**  
 Nozzle: **1.25mm**  
 Inlet of the foamer: **1/4in plug.**



### TRIGGER SPRAYERS

Hand held trigger sprayer for dispensing of water and washing liquids etc.

<b>G20124</b>	500ml
---------------	-------

<b>G20125</b>	1000ml
---------------	--------



# PRODUCT GUIDE 2023

## G20118



### GENERAL PURPOSE QUICK RELEASE LANCE & TRIGGER

Pressure Rated: **280 Bar Max.**  
Temp. Rated: **150° Celsius.**  
This product comes with an 900 mm pressure washer lance. Made from Zinc Plated Steel. It features a 3/8in BSPP male threaded probe inlet. Features a 1/4" BSPP quick attach female coupling outlet with flow control.

## G20119



### 220 BAR NOZZLE WITH ADAPTOR

Rating: **220 Bar.**  
Output: **11-15 LPM.**  
Fitment: **1/4in Quick Attach.**  
A highly durable tool designed for professional cleaning applications. Supplied with a quick attach coupling to attach to the G20118 Lance. Provides a powerful output. It provides an output of 3000 PSI of water pressure.

## G20120



### 275 BAR NOZZLE WITH FILTER & ADAPTOR

Rating: **275 Bar.**  
Output: **11-15 LPM.**  
Fitment: **1/4in Quick Attach.**  
The nozzle angle is 20°. Easy to install, this nozzle's ceramic is resistant to abrasion and will last for years to come. Allows you to clean even the toughest surfaces using your pressure washer up to 4000 psi.



### QUICK CONNECT NOZZLES INDIVIDUAL COLOURS

Quick connect nozzles. Pressure washer nozzles sold individually. Suitable for G19791 & G19792.

<b>G20260</b>	0° Size 030 Red
<b>G20261</b>	15° Size 030 Yellow
<b>G20262</b>	25° Size 030 Green
<b>G20263</b>	40° Size 030 White

## G20264



### QUICK CONNECT BLACK SOAPER NOZZLE

Size: **850.**  
Type: **Soaker.**  
Colour: **Black.**

Quick connect soaper nozzle. Pressure washer nozzle sold individually. Suitable for G19791, G19792, G19793 & G19794.



### QUICK CONNECT NOZZLES INDIVIDUAL COLOURS

Quick connect nozzles. Pressure washer nozzle sold individually. Suitable for G19793 & G19794.

<b>G20265</b>	0° Size 035 Red
<b>G20266</b>	15° Size 035 Yellow
<b>G20267</b>	25° Size 035 Green
<b>G20268</b>	40° Size 035 White



## W2 BOLT-TYPE CLIP HOSE STAINLESS STEEL

Suitable for clamping hosing to hose tails and couplings. Material: Steel. Corrosion resistant.

<b>G20426</b>	44-47 mm
<b>G20427</b>	48-51 mm
<b>G20428</b>	52-55 mm
<b>G20429</b>	56-59 mm
<b>G20430</b>	60-63 mm
<b>G20431</b>	64-67 mm



## W4 STANDARD CLIP HOSE STAINLESS STEEL (BOLT TYPE)

Suitable for clamping hosing to hose tails and couplings. Material: Steel. Corrosion resistant.

<b>G20464</b>	44-47mm
<b>G20465</b>	48-51 mm
<b>G20466</b>	52-55 mm
<b>G20467</b>	56-59 mm
<b>G20468</b>	60-63 mm
<b>G20469</b>	64-67 mm



## STAINLESS STEEL JUBILEE HOSE CLIP

Finish: **Stainless Steel**.  
Width: **9.9mm**.

<b>P0971030</b>	000 304SS 9.5-12mm
<b>P0971031</b>	M00 304SS 11-16mm
<b>P0971032</b>	00 304SS 13-20mm
<b>P0971033</b>	0 304SS 16-22mm
<b>P0971034</b>	0X 304SS 18-25mm
<b>P0971035</b>	1A 304SS 22-30mm
<b>P0971036</b>	1 304SS 25-35mm
<b>P0971037</b>	1X 304SS 30-40mm
<b>P0971038</b>	1M 304SS 32-45mm
<b>P0971039</b>	2A 304SS 35-50mm
<b>P0971040</b>	2 304SS 40-55mm
<b>P0971041</b>	2X 304SS 45-60mm
<b>P0971042</b>	3 304SS 55-70mm
<b>P0971043</b>	3X 304SS 60-80mm
<b>P0971044</b>	4 304SS 70-90mm
<b>P0971045</b>	4X 304SS 85-100mm
<b>P0971046</b>	5 304SS 90-120mm

## G20018



### MINI 2 PIECE RATCHET LASHING SET

Break strength: **1000kg.**  
Safe, secure & reliable.  
Ideal for keeping cargo in place and effectively eliminating any hazards related to falling loads  
2 pc 25mm x 4.5m ratchet tie down set.

## G20019



### MINI 4 PIECE RATCHET LASHING SET

Break strength: **1000kg.**  
Safe, secure & reliable.  
Ideal for keeping cargo in place and effectively eliminating any hazards related to falling loads  
4 pc 25mm x 4.5m ratchet tie down set.

## G20020



### TOW STRAP WITH BOW SHACKLES

Break strength: **9T.**  
Size: **10mm x 9m.**  
Tow Strap with Tested Bow Shackle. Strong & durable.  
Certificate for break load test on bow shackle and strap.

## G20021



### TOW STRAP WITH HOOKS

Break strength: **4T.**  
Size: **50mm x 6m.**  
Strap-style tow rope for moving vehicles in emergencies.  
Compact design allows for storage in the boot of a vehicle.  
5mm x 6m required.  
Certificate for break load test on bow shackle and strap.



### WIDE BUNGEE STRAP

Up to 3 times stronger than standard bungee cords.  
Rubberized grips for ultra control and comfort. Steel core inside for extra holding power.  
Max pull force: 12kg.

**G20005** Blue 19mm x 38cm

**G20006** Red 19mm x 60cm

**G20007** Yellow 19mm x 90cm



### STANDARD BUNGEE CORD

Up to 3 times stronger than standard bungee cords.  
Rubberized grips for ultra control and comfort. Steel core inside for extra holding power.

**G20008** Navy 10mm x 70cm

**G20009** Blue 10mm x 100cm

**G20010** Green 10mm x 130cm




## RUBBERISED BUNGEE CORD

Up to 2 times stronger than standard bungee cords. Rubberised grips for ultra control and comfort. Steel core inside for extra holding power.

**G20011** Yellow 8mm x 38cm

**G20012** Purple 8mm x 60cm

**G20013** Red 8mm x 100cm

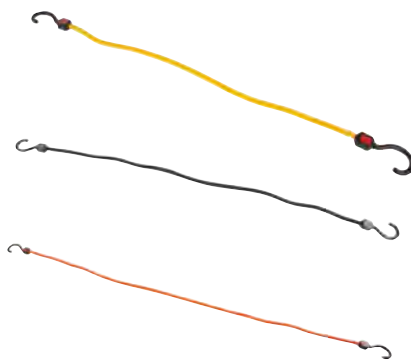

## HEAVY DUTY BUNGEE CORD

Heavy duty. Up to 3 times stronger than standard bungee cords. Rubberised grips for ultra control and comfort. Steel core inside for extra holding power.

**G20014** Orange 10mm x 70cm

**G20015** Black 10mm x 100cm

**G20016** Amber 10mm x 130cm

## G20017



## BUNGEE CORD SET 8 PIECE

Plastic outer sheath hook. Steel core inside for extra holding power. High grade cord.

Includes:

**2pc 8mm x 40cm.**

**2pc 8mm x 60cm.**

**2pc 8mm x 80cm.**

**2pc 8mm x 100cm.**

## G20099



## ATV SPRAYER BOOM KIT

Length: **10ft.**

Comes with mounting brackets & control valve for operating.

Minimum pump size required to operate: 8.3LPM. Hose: 3/8in.

3 nozzle folding boom covering 10ft, with spring loaded ends to avoid obstacles. Adjustable flow control & pressure gauge.

## G20502



## SPRAYER HOSE

Working Pressure: **20 bar.**

Bursting Pressure: **60 bar.**

Length: **50m coil.**

Outer Diameter: **15.5mm.**

Inner Diameter: **10mm.**

Herbicide spraying treatment of fields, paths, roadside verges, public parks. Insecticide treatment.

## G20269



## KNAPSACK COMPLETE HOSE & FITTING ASSEMBLY

Capacity: **16 Litre.**

Power: **12V.**

Replacement hose assembly for G19780 knapsack.



# PRODUCT GUIDE 2023

**G20270**



## KNAPSACK BRASS FITTING FOR HOSE ASSEMBLY

Replacement brass fitting for the hose assembly for G19780 knapsack.

**G20271**



## KNAPSACK PLASTIC NUT FITTING FOR HOSE ASSEMBLY

Replacement plastic nut fitting for hose assembly for G19780 knapsack.

**G20272**



## KNAPSACK FLAT SEAL FOR PLASTIC FEMALE HOSETAIL FITTING

Replacement flat seal for the female fitting on the hose assembly for G19780 knapsack.

**G20238**



## SIDE BUNG BLANK CAP

Thread Size: **3/4in.**  
Suitability: **G18657 G19123 G19125**

Side Bung Blank Cap. ATV sprayer tank side bung female blank cap.

**G20239**



## SPRAYER TANK STRAINER

Strainer for ATV sprayer tank lid.  
Suitable for ATV sprayers: **G18657, G19123 and G19125.**

**G20240**



## CLIP KIT FOR LANCE

Clip kit for mounting lance to sprayer tank.  
Suitable for ATV sprayers: **G18657, G19123 and G19125.**



## **G20241**



### **SUCTION HOSE FILTER**

Filter for end of suction hose inside sprayer tank.  
Suitable for ATV sprayers:  
**G18657, G19123 and G19125.**

## **G20343**



### **ATV PUMP ADAPTOR BRASS FEMALE**

Thread: **3/8in NPT Female.**  
Hosetail: **3/8in.**  
Suitable for ATV sprayers:  
**G19123 & G19125 and for use  
on G20155 yellow pump.**  
Female NPT thread one  
side x male hosetail on the other.

## **G20288**



### **NOZZLE FOR SPRAYER LANCE**

Nozzle For Spot Sprayer Trigger  
Lance 750mm. Replacement  
brass nozzle for ATV sprayer  
lance G19781.

## **G20362**



### **LANCE SPRAYER**

Size: **1000mm.**  
Hosetail: **3/8in**  
Replacement sprayer lance  
suitable for spot sprayers.  
Replacement for:  
**G18657, G19123, G19125.**

## **G20004**



### **RECHARGEABLE LED FLARE WITH MAGNET**

Amber LED warning flare with 9  
different functions. This smart  
and highly visible LED flare is  
ideal for plant and machinery to  
ensure maximum safety. This  
compact 12+3 LED light carries  
a powerful magnet to attach it to  
metal surfaces. The flare comes  
with an easy clip carry case for  
safety when not in use.

## **G20289**



### **LED RECHARGEABLE MAGNETIC BEACON WITH REMOTE**

LEDs: **10pcs.**  
Voltage: **12/24V.**  
Wattage: **28 Watt.**  
Working Time: **6 Hours.**  
Standard: **ECE R65, EMC R10.**  
7 functions: 3 modes flashing  
and 4 modes rotating.  
Comes with a wireless key fob/  
remote controller.

## G20496








### LED WIRELESS TRIANGLE WIRELESS KIT

Voltage: **12/24V.**

Contains LH and RH tail lights, brake light, dynamic indicator, and number plate lights. 100% cable free solution. Includes magnetic bases that are easy to install. This Wireless LED Dynamic Lighting Set meets the standards of EN 301489, EN 300328, EN 62479. E approved.

## SPARES FOR G20496



	ITEM	DESCRIPTION
	G20497	<b>PLUG 7 PIN REPLACEMENT WIRELESS KIT.</b> Replacement 7 pin plug with built in antenna for the wireless trailer magnetic LED light kit G20496.
	G20498	<b>CIGAR PLUG C/W DISPLAY &amp; USB WIRELESS KIT.</b> Replacement cigarette charger plug with light up display for LED wireless kit G20496.
	G20499	<b>LED LH LIGHT REPLACEMENT WIRELESS KIT.</b> Replacement LED Light for wireless trailer magnetic LED light kit G20496. For pairing instructions, see website. Please choose the correct side, left or right.
	G20500	<b>LED RH LIGHT REPLACEMENT WIRELESS KIT.</b> Replacement LED Light for wireless trailer magnetic LED light kit G20496. For pairing instructions see website. Please choose the correct side, left or right.
	G20501	<b>CHARGING CABLE FOR WIRELESS KIT.</b> Replacement USB cable for charging wireless trailer magnetic LED light kit G20496.


# GENFITT

## Introducing Our **NEW GENFITT** **ORDERING APP**

Need to order an item or find  
your customer details easily  
& quickly?

No problem,  
you can do it all  
**HERE!**

## Download The App Now!

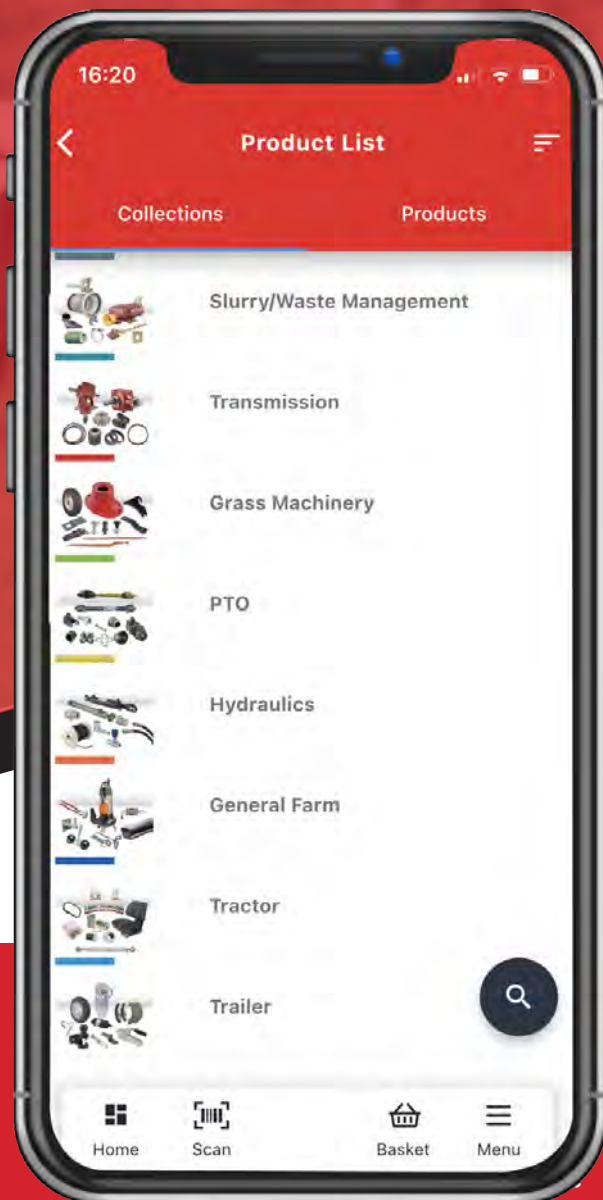

## It's Easy!

Just contact your  
local representative  
or contact us at  
Genfitt.

[www.genfitt.ie](http://www.genfitt.ie)



**GENERATIONS OF KNOWLEDGE  
AT YOUR SERVICE**

Genfitt Mayo Ltd.  
Knock Road  
Kiltimagh  
Co. Mayo  
F12 K732  
Ireland

[info@genfitt.ie](mailto:info@genfitt.ie)

+353 (0) 94 93 81377

**[www.genfitt.ie](http://www.genfitt.ie)**